

# Self-Propelled Scissor Lifts

GS™ -1330m




## Specifications

Model	GS™ -1330m	
Measurements	Metric	US
Working height maximum*	5.81 m	18 ft 6 in
▲ Platform height maximum	3.81 m	12 ft 6 in
▲ Platform height - stowed	0.90 m	2 ft 11 in
▲ Platform length - outside	1.26 m	4 ft 2 in
extended	1.72 m	5 ft 8 in
Slide-out platform extension deck	0.46 m	1.5 ft
▲ Platform width - outside	0.67 m	26.5 in
Guardrail height	1.10 m	3 ft 7 in
Toeboard height	0.15 m	6 in
▲ Height - stowed, fixed rails	2.02 m	6 ft 7.5 in
Length - stowed	1.41 m	4 ft 8 in
- stowed extended	1.87 m	6 ft 2 in
▲ Width	0.78 m	30.5 in
Wheelbase	0.98 m	3 ft 3 in
▲ Ground clearance - centre	6 cm	2.4 in
▲ - with pothole guards deployed	2 cm	0.83 in
<b>Productivity</b>		
Max platform occupancy (indoor/outdoor)**	2/-	2/-
Lift capacity	227 kg	500 lb
Lift capacity - extension deck	91 kg	200 lb
Drive height	Full height	
Drive speed - stowed	4.0 km/h	2.5 mph
Drive speed - raised	0.8 km/h	0.5 mph
Gradeability - stowed***	25%/14°	25%/14°
Turning radius - inside	40 cm	15.7 in
Turning radius - outside	1.55 m	5 ft 1 in
Raise/lower speed	20 / 22 sec	
Controls	Proportional	
Drive	dual rear wheel, electric	
Brakes	dual rear wheel, electric	
Tyres solid non-marking	25.4 x 7.6 cm	10 x 3 in
<b>Power</b>		
Power source	24 V DC (two 12 V 85 Ah batteries)	
Hydraulic system capacity	1.5 gal	5.6 L
<b>Weight****</b>		
	887 kg	1,953 lb

## Standards Compliance

AS 1418.10

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Indoor use only for the GS-1330m  
 \*\*\* Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.  
 \*\*\*\* Weight will vary depending on options and/or country standards.

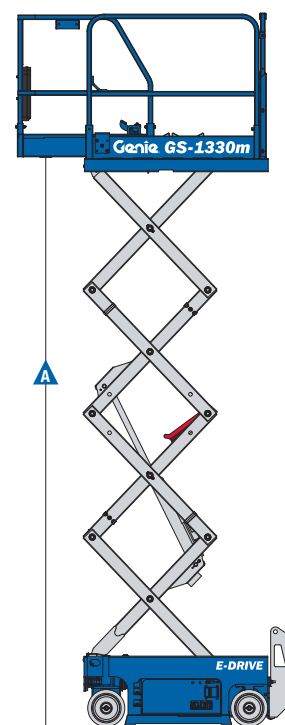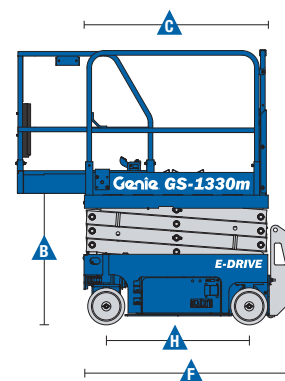

# Self-Propelled Scissor Lifts

GS™ -1330m

## Features

### Standard Features

#### Measurements

##### GS-1330m

- 5.81 m (18 ft 6 in) working height
- Up to 227 kg (500 lb) lift capacity

#### Productivity

- Folding rails with half-height swing gate
- Dual rear wheel DC electric drive
- Smart Link™ control system (joystick, 2 lift speeds & 2 selectable proportional drive speeds, user-friendly diagnostics)
- Rear charger receptacle
- Platform control with battery charge indicator
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Dual rear wheel electric brakes
- Electric brake release
- Swing-out component trays
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Motion alarm
- Dual flashing LED beacons
- Automotive horn
- Hour meter

#### Power

- 24 V DC battery pack
- Universal 20 amp smart charger

#### Platform

- 1.26 m x 0.67 m (50 x 26.5 in) steel platform
- 0.46 m (1.5 ft) extension deck

#### Power

- 24 V DC (two 12V 85 Ah batteries)

#### Tyres

- Solid non-marking

### Options & Accessories

#### Productivity Options

- Power to platform: plug, socket, with optional Residual-current Circuit Breaker with Overcurrent protection

#### Power Options

- AGM maintenance-free batteries

