
MARKET LEADER BUILT TOUGH

ACCESS EXPRESS



MARKET LEADER **BUILT TOUGH**

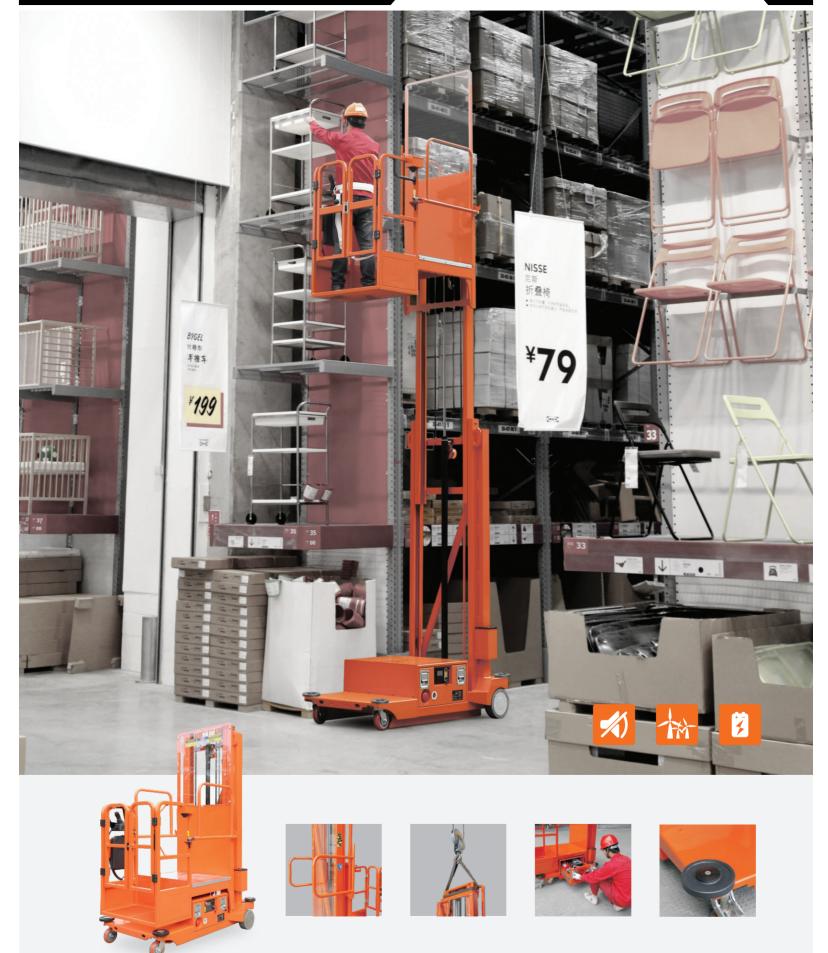

Self-propelled Aerial Stock Picker

PARAMETER

Model	ZDYT 3-3.0S	ZDYT 3-3.7S	ZDYT 3-4.5S
S.W.L	300kg	300kg	300kg
Max. Occupants	1	1	1
Max. Working Height (A)	5.00m	5.70m	6.50m
Max. Platform Height B	3.00m	3.70m	4.50m
Overall Length Overall Length	1.56m	1.56m	1.59m
Overall Width	1.06m	1.06m	1.06m
Overall Height (2.07m	2.42m	2.28m
Platform Size(Length×Width)	0.71m×0.80m	0.71m×0.80m	0.71m×0.80m
Ground Clearance	0.08m	0.08m	0.08m
Wheelbase	1.27m	1.27m	1.30m
Turning Radius	0	0	0
Drive Motor	2×24VDC/0.4kW	2×24VDC/0.4kW	2×24VDC/0.4kW
Lifting Motor	24V/2.2kW	24V/2.2kW	24V/2.2kW
Travel Speed(Stowed)	4.0km/h	4.0km/h	4.0km/h
Travel Speed(Raised)	0.8km/h	0.8km/h	0.8km/h
Up/Down Speed	18/17sec	22/19sec	20/17sec
Batteries	2×12V/105Ah	2×12V/105Ah	2×12V/105Ah
Integrated Charger	24V/30A	24V/30A	24V/30A
Gradeability	25%	25%	25%
Max. Working Slope	1.5°/2°	1.5°/2°	1.5°/2°
Tyres(Drive Motors)	Ф 230×80mm	Ф230×80mm	Ф230×80mm
Tyres(Front Wheels)	6in	6in	6in
Weight	690kg	720kg	840kg


Standard Equipment

Proportional Controls Self-lock Gate On Platform Drivable At Full Height Non Marking Tyre 2WD Automatic Brake System **Emergency Lowering System** Emergency Stop Button Cylinder Holding Valve Onboard Diagnostic System Tilt Sensor With Alarm All Motion Alarm Horn Hour Meter Automatic Pothole Protection **Charger Protection** Flashing Beacon


Overload Sensor With Alarm

Options

Platform Work Light Chassis Protect Cover







flin