

SELF-PROPELLED SCISSOR LIFTS

GS™-3384 RT

Specifications

MODEL		GS™-3384 RT	
MEASUREMENTS		Metric	US
Working height maximum*		12.06 m	39 ft
A Platform height maximum		10.06 m	33 ft
B Platform height - stowed**		1.55 m	5 ft 1 in
C Platform length:		3.98 m	13 ft 0.5 in
outside, extended - single deck		5.34 m	17 ft 6.25 in
outside, extended - dual deck		6.57 m	21 ft 6.5 in
D Slide-out platform extension deck - front		1.52 m	5 ft
E Slide-out platform extension deck - rear		1.22 m	4 ft
F Platform width - outside		1.83 m	6 ft
G Height - stowed: - folding guardrails		2.68 m	8 ft 9.5 in
- rails lowered		2.00 m	6 ft 6.75 in
H Length - stowed with outriggers		4.88 m	16 ft
I Width: - standard tyres		2.13 m	7 ft
- high flotation tyres		2.41 m	7 ft 11 in
J Wheelbase		2.84 m	9 ft 4 in
K Ground clearance - centre		0.33 m	13 in


PRODUCTIVITY			
Maximum platform occupancy		7	7
Lift capacity		1,134 kg	2,500 lbs
Lift capacity - extension deck		227 kg	500 lbs
Drive speed - stowed		6.4 km/h	4.0 mph
Drive speed - raised		1.1 km/h	0.7 mph
Gradeability - stowed***		50%	50%
Maximum outrigger leveling: - front to back		7°	7°
- side to side		12°	12°
Turning radius - inside		3.09 m	10 ft 1.5 in
Turning radius - outside		5.94 m	19 ft 6 in
Raise/lower speed		45 / 29 sec	45 / 29 sec
Controls		proportional	
Drive		four wheel	
Tyres - foam-filled rough terrain		25 x 79 cm	10 x 31 in

POWER			
Power source		Deutz D2011L03i 3 cylinder diesel 36 kW (49 hp) air cooled	
Auxiliary Power unit		12 V DC	
Fuel tank capacity		113.6 L	30 gal
Hydraulic system capacity		113.6 L	30 gal

WEIGHT****			
with outriggers		6,743 kg	14,866 lbs

STANDARDS COMPLIANCE ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Based on RT tyres. Deduct 2 in (5.8 cm) for turf and non-marking.
 *** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 **** Weight will vary depending on options and/or country standards.

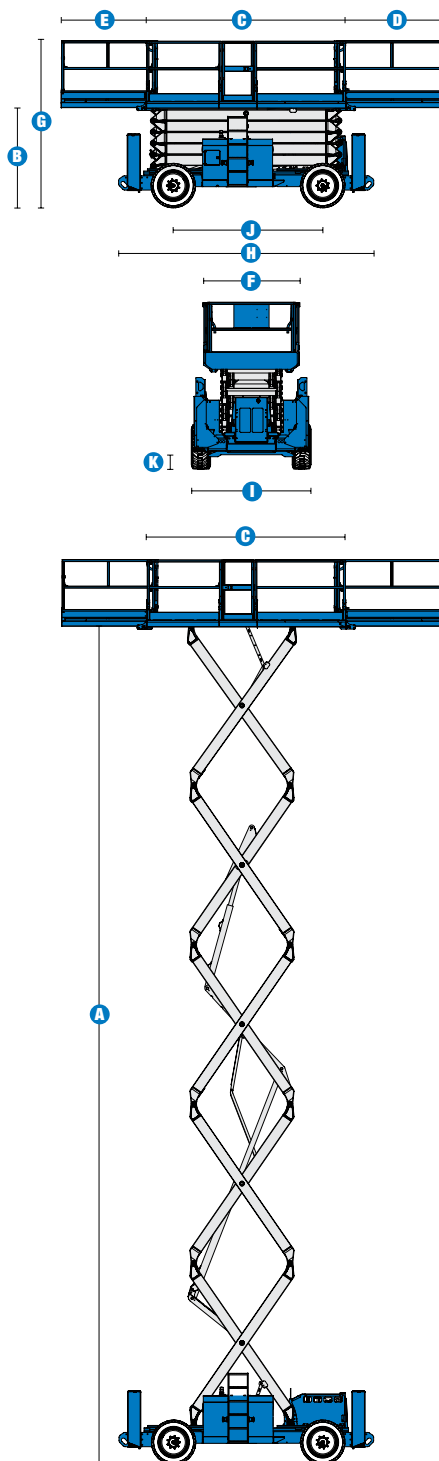

SELF-PROPELLED SCISSOR LIFTS

GS™ -3384 RT

Features

STANDARD FEATURES

MEASUREMENTS

- 12.06 m (39 ft) working height
- Up to 1,134 kg (2,500 lbs) lift capacity

PRODUCTIVITY

- 3.98 m x 1.83 m (13 ft 0.5 in x 6 ft) steel frame platform with replaceable diamond plate deck
- Dual slide-out platform extension decks 1.52 m (5 ft) front and 1.22 m (4 ft) rear
- Automatic leveling hydraulic outriggers
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- Two self-closing full height swing gates
- 4WD
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Hydraulic oil cooler
- Foam-filled rough terrain tyres
- Tilt alarm
- Descent alarm
- Horn
- Hour meter
- Dual flashing beacons
- Motion alarm

POWER

- Deutz diesel 36 kW (49 hp)

OPTIONS & ACCESSORIES

PRODUCTIVITY

- Air line to platform
- Non-marking rough terrain tyres 25 x 79 cm (10 x 31 in)
- High flotation foam-filled tyres 41 x 84 cm (16 x 33 in)
- Platform work lights

POWER OPTIONS

- 7 kVA Hydraulic generator (240 V/50 Hz)
- Cold weather package
- Arctic package
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)
- 240 V power to platform

