

# ERT SERIES

ELECTRIC POWERED ROUGH TERRAIN SCISSOR LIFT



## Performance

Platform Height—Elevated		
ERT2669	26'2"	8 m
ERT3369	32'8"	10 m
ERT4069	40'3"	12.3 m
ERT4769	47'	14.3 m
Platform Height — Lowered		
ERT2669	4'3"	1.3 m
ERT3369	4'9"	1.5 m
ERT4069	4'10"	1.5 m
ERT4769	5'4"	1.6 m
Platform Capacity (Single Extension)		
ERT2669	1,500 lb	680 kg
ERT3369	1,000 lb	453.59 kg
ERT4069	800 lb	363 kg
ERT4769	800 lb	363 kg
— Capacity on Deck Extension	300 lb	136 kg
No. Occupants (Indoor/Outdoor)		
ERT2669	4/4	
ERT3369	4/2	
ERT4069	3/2	
ERT4769	3/2	
Lift/Lower Time		
ERT2669	36/28 seconds	
ERT3369	42/33 seconds	
ERT4069	69/46 seconds	
ERT4769	81/55 seconds	
Maximum Drive Height	Full Height	
Weight (single extension w/out leveling jacks)*		
ERT2669	8,627 lb	3,913 kg
ERT3369	9,427 lb	4,276 kg
ERT4069	10,560 lb	4,790 kg
ERT4769	13,636 lb	6,194 kg
Drive Speed—Lowered	3.5 mph	5.6 km/h
Drive Speed—Elevated	0.5 mph	0.8 km/h
Max Tilt Rating (side-to-side)	2.5 Degrees	
Max Tilt Rating (fore & aft)	3 Degrees	
Gradeability		
ERT2669	40%	
ERT3369	40%	
ERT4069	35%	
ERT4769	30%	
Turning Radius (Inside)	83"	2 m
Turning Radius (Outside)	175"	4 m

\* Certain options or country standards will increase weight.

## Standard Specifications

### Power Source

Drive (2WD)	AC Electric Drive
-------------	-------------------

### Tires

Tire size (non-marking)	26 x 12 Foam Filled
-------------------------	---------------------

### Hydraulic System

Hydraulic Reservoir	13.2 gal (50L)
---------------------	----------------



## Standard Features

- 42in Roll-out Deck Extension
- Moveable, Removable Platform Console
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-closing Gate
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent Pull Cable<sup>1</sup>
- Oscillating Front Axle
- Scissor Maintenance Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Non-Marking Tires
- 110V-AC Receptacle In Platform
- 23 Amp Automatic, SCR Battery Charger
- 8 x 6V, 225 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 310 Amp-Hour Batteries (ERT4069)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4769)
- All Motion Alarm
- Descent Alarm
- Horn
- Hourmeter
- 2WD AC Drive System
- Proportional Lift and Drive
- LCD Display with LiftSense System
- Pin-based Load Sensing System
- Telematics-Ready Harness

## Accessories & Options

- Hydraulic Leveling Jacks (Auto Level)
- 26 x 12 Foam Filled Lug Tread Tires
- 8 x 6V, 310 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4069)
- Flashing Amber Beacon - LED
- Dual Flashing Amber Beacons - LED
- White Noise Backup Alarm
- JLG CleanGuard
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Operator Access Control
- Generator Set (Kubota Stage V OC60-E4) 6hp (4.5kW)
- Heavy Duty Pipe Racks

1. ERT4769 Includes a Push-Button Manual Descent System


**ERT SERIES**

ELECTRIC POWERED ROUGH TERRAIN SCISSOR LIFT



**Dimensions**

All dimensions are approximate.

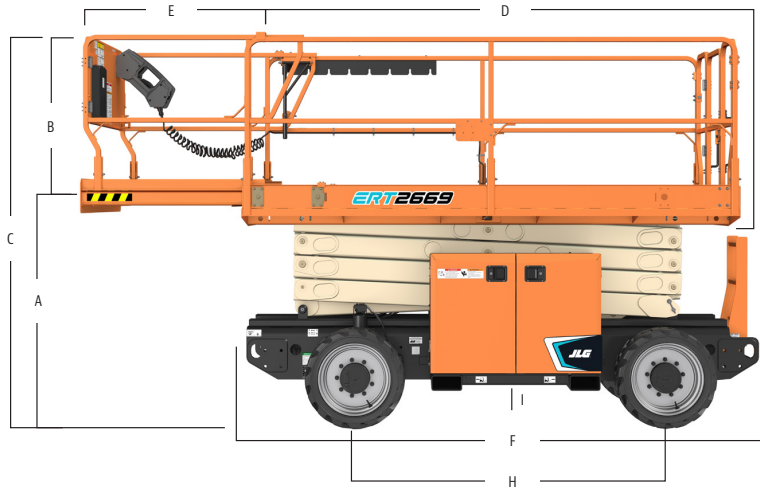

Platform Height – Elevated

ERT2669	26'2"	7.98 m
ERT3369	32'8"	9.96 m
ERT4069	40'3"	14.1 m
ERT4769	47'	14.3 m

A. Platform Height – Lowered

ERT2669	4'3"	1.3 m
ERT3369	4'9"	1.46 m
ERT4069	4'10"	1.46 m
ERT4769	5'4"	1.62 m

B. Platform Railing Height\*

ERT4769	44.7"	1.14 m
---------	-------	--------

\*Fold Down Rails

C. Overall Height

ERT2669	96.7"	2.46 m
ERT3369	102.9"	2.61 m
ERT4069	103"	2.62 m
ERT4769	109.1"	2.77 m

D. Platform Dimensions

ERT4769	130.5" x 63"	3.3 x 1.6 m
---------	--------------	-------------

E. Platform Extension

ERT4769	42"	1.07 m
---------	-----	--------

F. Overall Machine Length

ERT4769	139"	3.53 m
---------	------	--------

G. Overall Machine Width

ERT4769	69.3"	1.76 m
---------	-------	--------

H. Wheelbase

ERT4769	81.3"	2.07 m
---------	-------	--------

I. Ground Clearance

ERT4769	10.1"	25.7 cm
---------	-------	---------