

# RT SERIES

ENGINE POWERED ROUGH TERRAIN SCISSOR LIFTS



## Performance

Platform Height—Elevated		
RT2669	26'2"	8 m
RT3369	32'8"	10 m
RT4069	40'3"	12.3 m
RT4769	47'	14.3 m
Platform Height — Lowered		
RT2669	4'3"	1.3 m
RT3369	4'9"	1.5 m
RT4069	4'10"	1.5 m
RT4769	5'4"	1.6 m
Platform Capacity (Single Extension)		
RT2669	1,500 lb	680 kg
RT3369	1,000 lb	454 kg
RT4069	800 lb	363 kg
RT4769	800 lb	363 kg
— Capacity on Deck Extension	300 lb	136 kg
No. Occupants (Indoor/Outdoor)		
RT2669	4/4	
RT3369	4/2	
RT4069	3/2	
RT4769	3/2	
Lift/Lower Time		
RT2669	36/28 seconds	
RT3369	42/33 seconds	
RT4069	69/46 seconds	
RT4769	81/55 seconds	
Maximum Drive Height		
	Full Height	
Weight (single extension w/out leveling jacks)*		
RT2669	8,058 lb	3,655 kg
RT3369	8,856 lb	4,017 kg
RT4069	10,536 lb	4,779 kg
RT4769	13,635 lb	6,185 kg
Drive Speed—Lowered		
	3.5 mph	5.6 km/h
Drive Speed—Elevated		
	0.5 mph	0.8 km/h
Max Tilt Rating (side-to-side)		
	2.5 Degrees	
Max Tilt Rating (fore & aft)		
	3 Degrees	
Gradeability		
RT2669	40%	
RT3369	40%	
RT4069	35%	
RT4769	30%	
Turning Radius (Inside)		
	83"	2 m
Turning Radius (Outside)		
	175"	4 m

\* Certain options or country standards will increase weight.

## Standard Specifications

### Tires

Tire Size	26 x 12 Foam Filled
-----------	---------------------

### Engine

Dual Fuel Engine	Kubota WG972-GL-E4 31 hp (23.2 kw)
Diesel Engine	Kubota D1305-E4B 24.8 hp (18.5 kw)
Fuel Tank Capacity	10 gal (38L)

### Drive

4WD Hydrostatic

### Hydraulic System

Hydraulic Reservoir	13.2 gal (50 L)
---------------------	-----------------



## Standard Features

- 42in Roll-out Deck Extension
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-Closing Gate
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent Pull Cable<sup>1</sup>
- Oscillating Front Axle
- Scissor Maintenance Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Lug Tread Tires
- 110V-AC Receptacle In Platform
- All Motion Alarm
- Horn
- Hourmeter
- Proportional Lift and Drive
- Pin-based Load Sensing System
- Telematics-Ready Harness
- LCD Display with LiftSense System
- Fold Down Rails
- ECU Controlled Engine Speed
- Remote Engine Oil Filter Package
- ANSI A92.20 Compliant

## Accessories & Options

- 33.5 lb Aluminum Propane Tank
- Moveable, Removable Platform Control Box
- Hydraulic Leveling Jacks (Auto Level)
- Hydraulic Oil Cooler (Excludes RT4769)
- 26 x 12 Foam Filled Non-Marking Tires
- Flashing Amber Beacon - LED
- Dual Flashing Amber Beacons - LED
- White Noise Backup Alarm
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Operator Access Control
- 2500W Generator 60Hz/110V (Belt-driven)
- Dual LP Tanks (Dual Fuel Engines only)
- QuikLevel Advanced
- Heavy Duty Pipe Racks
- 2WD

1. RT4769 includes a Push-Button Manual Descent System


**RT SERIES**

ENGINE POWERED ROUGH TERRAIN SCISSOR LIFTS



**Dimensions**

All dimensions are approximate.

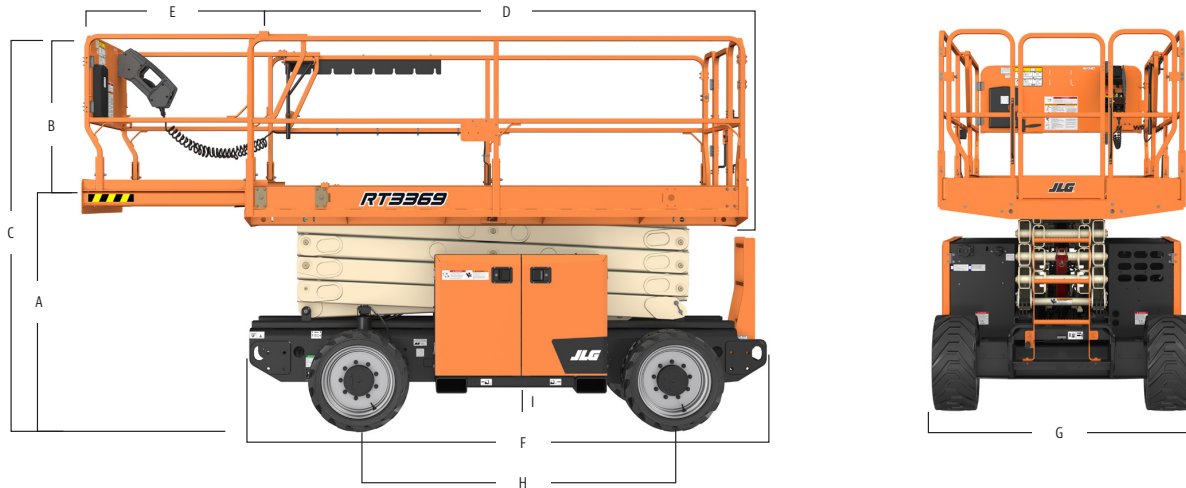

Platform Height — Elevated

RT2669	26'2"	7.98 m
RT3369	32'8"	9.96 m
RT4069	40'3"	14.1 m
RT4769	47'	14.3 m

A. Platform Height — Lowered

RT2669	4'3"	1.3 m
RT3369	4'9"	1.46 m
RT4069	4'10"	1.46 m
RT4769	5'4"	1.62 m

B. Platform Railing Height\*

RT2669	44.7"	1.14 m
RT3369	44.7"	1.14 m
RT4069	44.7"	1.14 m
RT4769	44.7"	1.14 m

C. Overall Height

RT2669	96.7"	2.46 m
RT3369	102.9"	2.61 m
RT4069	103"	2.62 m
RT4769	109.1"	2.77 m

D. Platform Dimensions

130.5" x 63"	3.3 x 1.6 m
--------------	-------------

E. Platform Extension

42"	1.07 m
-----	--------

F. Overall Machine Length

139"	3.53 m
------	--------

G. Overall Machine Width

69.3"	1.76 m
-------	--------

H. Wheelbase

81.3"	2.07 m
-------	--------

I. Ground Clearance

10.1"	25.7 cm
-------	---------

\*Fold Down Rails